

**APPLICATIONS**

The UPN circulator Pumps in stainless steel are specifically designed for household hot water systems, and solar hot water applications.


**FEATURES**

- Meets requirements of AS/NZS 4020 “Testing of products for use in contact with drinking water”. No risk to water quality thanks to the main components being stainless steel (pump housing, bearing plate, stator and rotor can (stainless steel AISI 304)
- Interchangeable with most of the installed bronze models (150 mm port to port)
- Especially designed for hot water application  
UP20-60N model can also be used with chilled water from +2 °C


**TECHNICAL FEATURES**

Model		UP20-60N
Voltage	V	1 x 240
P1	W	90
In	A	0.37
Enclosure & Insulation class		IP44/F
Liquid temperature range	°C	+2 C to +110
Port to port dimension	mm	150
Union set (pn 52-99-82)		¾" F
Net weight	kg	2.8

**INSTALLATION**

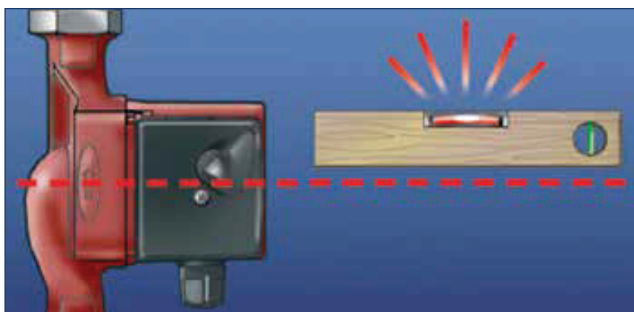

**PERFORMANCE**

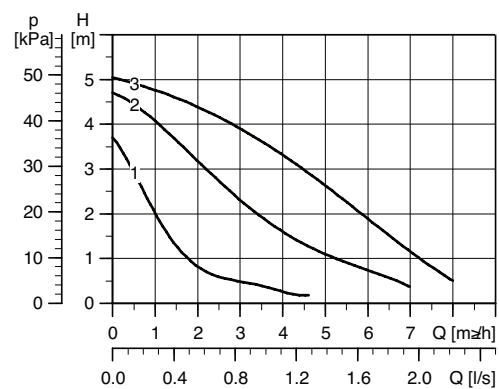

**DIMENSIONS**

